

Mini-Rooter™


Gives you light weight with a long reach.

With 75 feet of 3/8" cable and a 1/3 hp motor, the Mini-Rooter clears lines from roof-top to basement, including kitchen, bath and laundry drains. You can do heavier work in 4" lines when the Mini-Rooter is equipped with a 1/2" cable.

This inexpensive, light-weight machine has lots of time-saving features. For instance, you can remove the drum in seconds for more portability or to switch to a different diameter cable – with no mess and no lost time. A distributor tube inside the drum allows you to feed cable in and out without chucking and releasing the cable every few feet – so you finish quicker. An optional power cable feed gives you better feeding and retracting control.

For small drain work, you can order your Mini-Rooter with a "J" Drum or a Dual Drum for handling smaller, more flexible cables. An optional Mini-Rooter dolly lets you roll the machine to and from the job on 8" semi-pneumatic wheels.

Some Mini-Rooter safety features: A foot pedal that uses air pressure to start and stop the machine with no electrical wiring between pedal and motor, a ground fault circuit interrupter, and a high impact plastic guard covering the motor pulley.

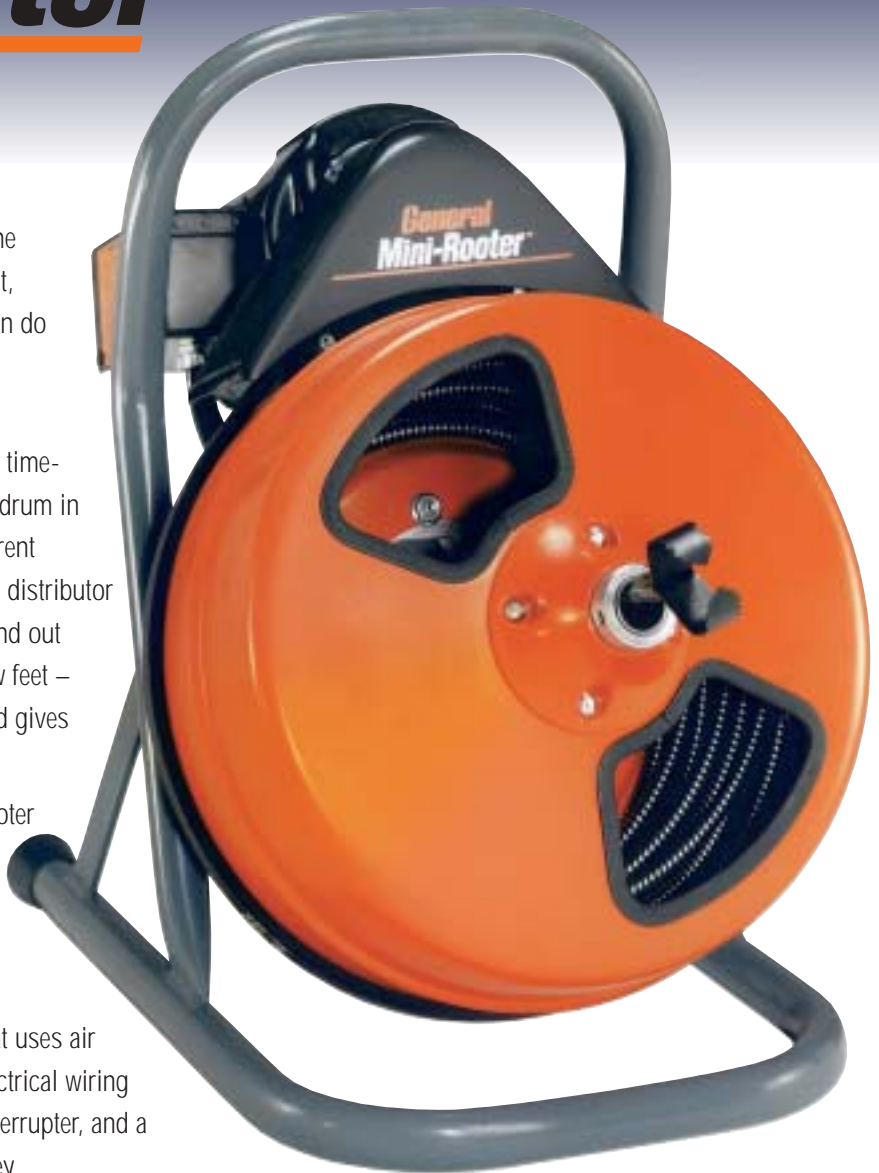

POWER CABLE FEED

Variable speed power cable feed attachment gives better feeding and retracting control. Quickly adjusts for 3/8" or 1/2" cables without the need for tools or additional parts. Swings out of the way to make drum changing as easy as ever. Fits all Mini-Rooter models.

Catalog Number PO-MR



MINI-ROOTER DOLLY

This lightweight but sturdy dolly is designed especially for the Mini-Rooter. It slips on or off in less than a minute and holds the machine securely.

Catalog Number MR-W



The toughest tools down the line.™

General / **General Wire Spring Co.**
PIPE CLEANERS

1101 Thompson Avenue • McKees Rocks, PA 15136 USA
800-245-6200 or 412-771-6300 • Fax: 412-771-2771
www.drainbrain.com • e-mail: info@drainbrain.com

Continued next page

Mini-Router™



REMOVABLE DRUM

You can take the drum off the Mini-Router in seconds.

J-DRUM

With a J-Drum, you're ready for small drain work in seconds. Equipped with a collet chuck with tightening handle. Will hold any Super-Vee cable.

Catalog Number MR-250

DUAL DRUM

Holds two small dia. cables at the same time. For instance, you can switch from a 1/4" to a 3/8" size without removing either one from the drum. Smaller cable is in an inner drum, while larger cable is between inner drum and drum shell. Will hold any Super-Vee cable.

Catalog Number MR-280



FLEXICORE® CABLE



Wire Rope Center Construction

Heavy-gauge wire coiled tightly around 42-strand aircraft-type wire rope and heat treated. Has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870

SPECIFICATIONS:

Weight:

37 lbs. (17 kg) without cable.

Dimensions:

18" deep x 12" wide x 19" high.
(45 cm x 30 cm x 46 cm)

Drum:

Capacity of 75 ft. of 3/8" or 1/2" Flexicore wire rope center cable. Integral distributor tube. Oilite bronze and ball thrust bearings.

J-Drum:

Capacity of 50 ft. of 1/4" or 5/16" Flexicore cable.

Dual Drum:

Capacity of 25 ft. of 1/4" or 5/16" in inner drum.
50 ft. of 5/16" or 3/8" Flexicore cable in outer drum.

Cutter Set:

See below.

Motor:

1/3 hp, with forward-off-reverse switch, spring-loaded mounting for proper belt tension.

Load Speed:

165 rpm.

Belt Guard:

High impact plastic.

Power Cable Feed

(Optional) Drives 1/2" and 3/8" cables.

Foot Pedal:

Leaves operator's hands free to control cable. Uses air pressure, so there's no electrical contact between pedal and motor.


Power Cord:

10 ft. 3 wire vinyl covered with molded plug. In-line ground fault circuit interrupter.

Leather Gloves:

With reinforced palm for hand protection and proper slippage when guiding cable.

Cutter Set

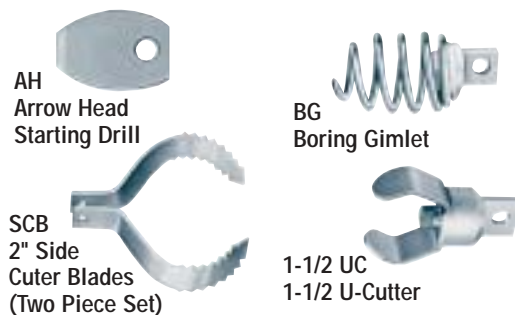

The toughest tools down the line.™

General / **General Wire Spring Co.**
PIPE CLEANERS

1101 Thompson Avenue • McKees Rocks, PA 15136 USA
800-245-6200 or 412-771-6300 • Fax: 412-771-2771
www.drainbrain.com • e-mail: info@drainbrain.com